



THOUGHTFULLY DESIGNED COATINGS

# URETHANE POLYMER CONCRETE (UPC)

Before selecting, consider temperature, humidity, schedule, applicator's skill level, and substrate.


## CHOOSE A COATING (PART C)

- RC** roll coat, 5–30 mils
- SL** self-leveler, 1/8–1/4"
- MF** heavy-duty self-leveler, 1/8–1/4"
- TT** tight trowel, 1/4–4"
- WC** wall cove, 1-10"
- VC** vertical coat, 3–8 mils

## MATCH THE LETTERS & CHOOSE PART B

- RC/TT, SL/MF OR WC/VC**
- EZ** high application temps
- AP** all purpose
- FC** low application temps

Apply it **UNPIGMENTED** or add **UPC COLORANT**:

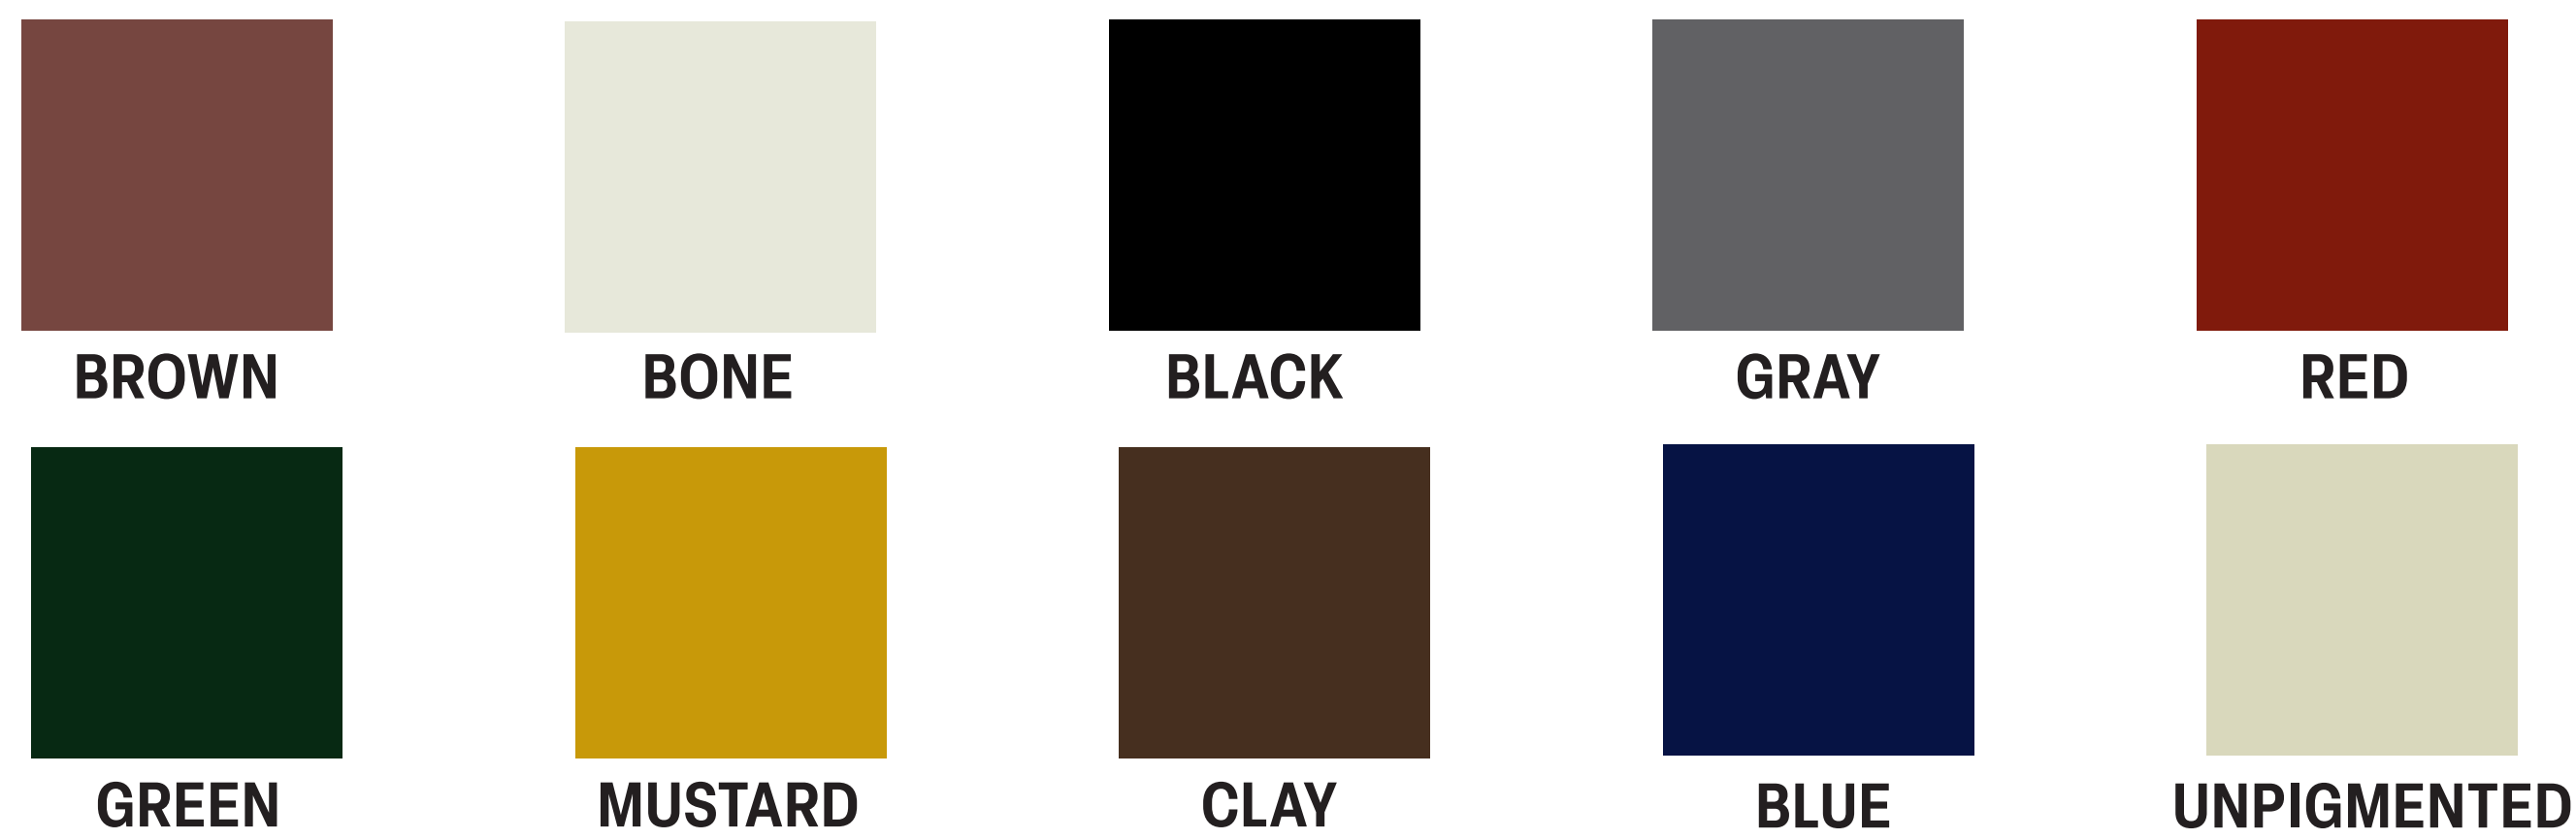

## MATCH THE LETTERS FOR PART A

- RC/TT**
- SL/MF**
- WC/VC**



**KIT SIZES: SINGLE • DOUBLE • DRUMS • TOTES**

[kretus.com/urethane-polymer-concrete](http://kretus.com/urethane-polymer-concrete)