



THOUGHTFULLY DESIGNED COATINGS

POLYASPARTIC (PA)

Before selecting, consider temperature, humidity, schedule, applicator's skill level, and substrate.

CHOOSE PART B

72% solids, concrete primer, 8-14 mils
85% solids, all purpose, 8-14 mils
92 LOW ODOR 100% solids, cold storage to -20°F, concrete repair, all purpose, 8-14 mils

MATCH THE NUMBER & CHOOSE PART A


72, 85, OR 92 LOW ODOR

EZ high application temps
FC low to mid application temps & low RH
XFC low to freezing application temps & low RH



kretus.com/polyaspartic

Apply it **CLEAR** or add **POLY COLORANT**:

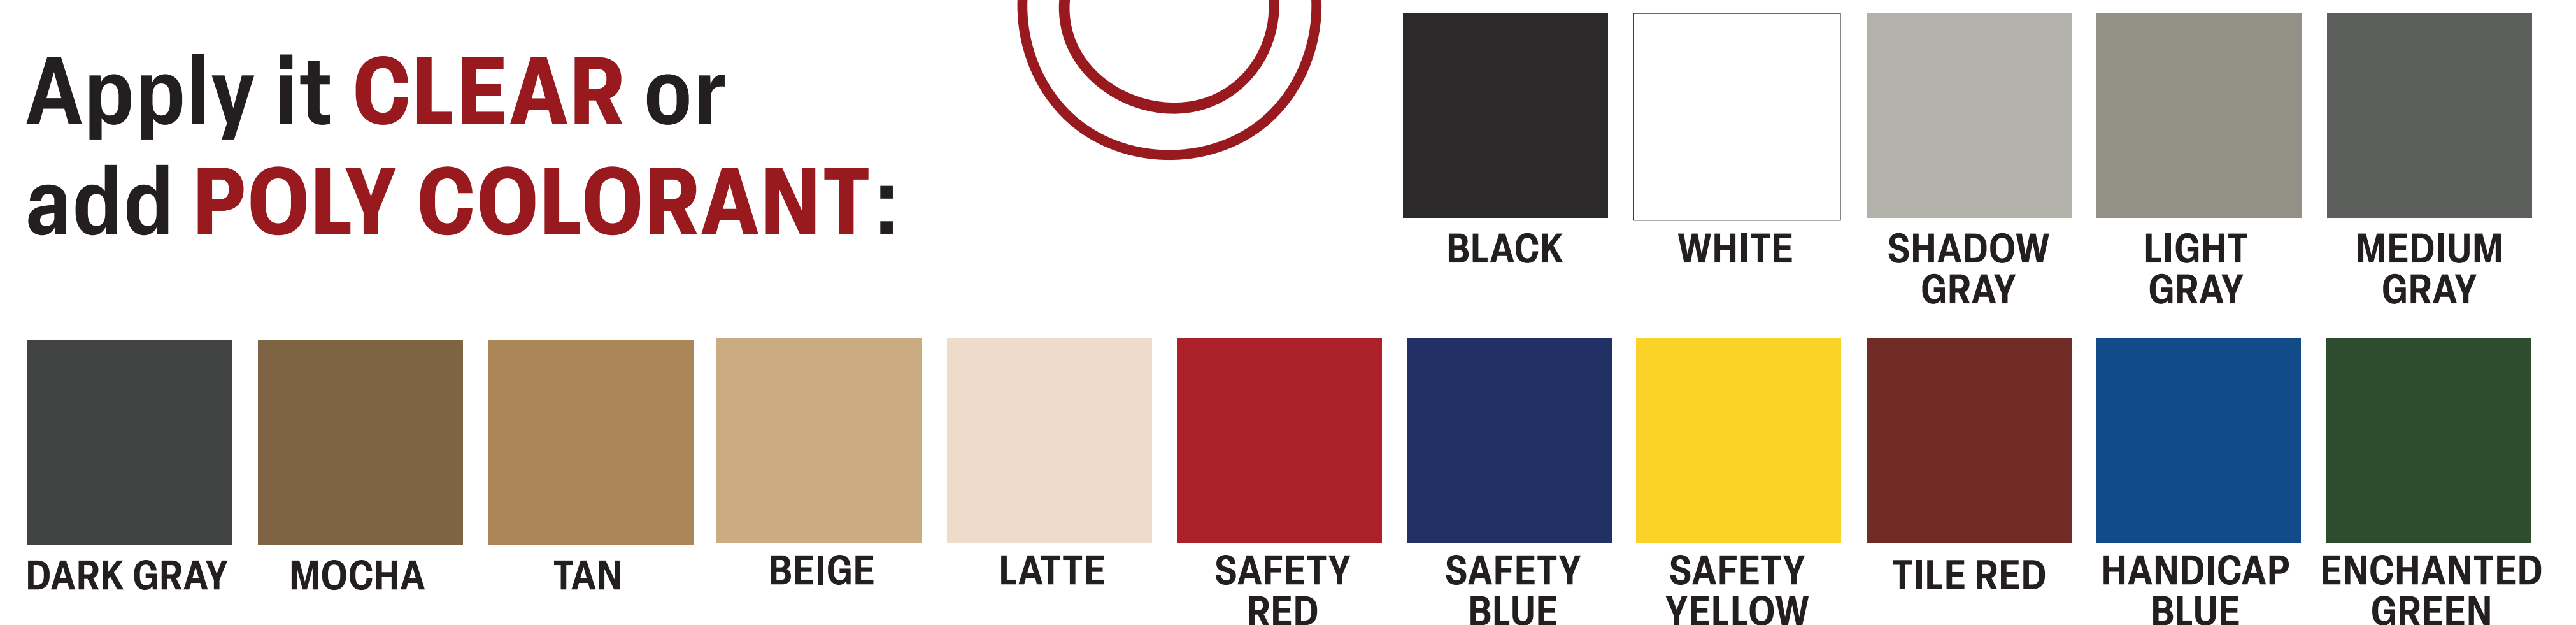

KIT SIZES: 2 GALLON • 10 GALLON • 100 GALLON