



**BRIGHTEN
YOUR WORLD**

COLOR SPLASH





Enhance a structure's natural color and features in clear gloss or cover walls and floors in warm or cool tones with **KRETUS® Color Splash Sealer Systems**. Available in Acrylic, Epoxy, Poly, or UPC (Urethane Polymer Concrete), KRETUS® Color Splash protects concrete, wood, drywall, and masonry from minor scratches, bacterial and fungal growth, UV degradation, and water intrusion in just 3 coats.


Efficient and easy to apply, **KRETUS® Color Splash Sealer Systems** add a pop of color to architecture restoration projects, interior design, warehouse walls and floors, and more. Best for

- light- to heavy-traffic commercial, industrial, and residential areas
- architectural coatings (Color Splash Acrylic or Poly Sealer Systems)

Chemical and Stain Resistant

KRETUS® Color Splash Systems withstand most chemicals, food and alcohol spills, and automotive grease and oil.

UV-Resistant Color Splash WBB (Acrylic Sealer) Trending Options

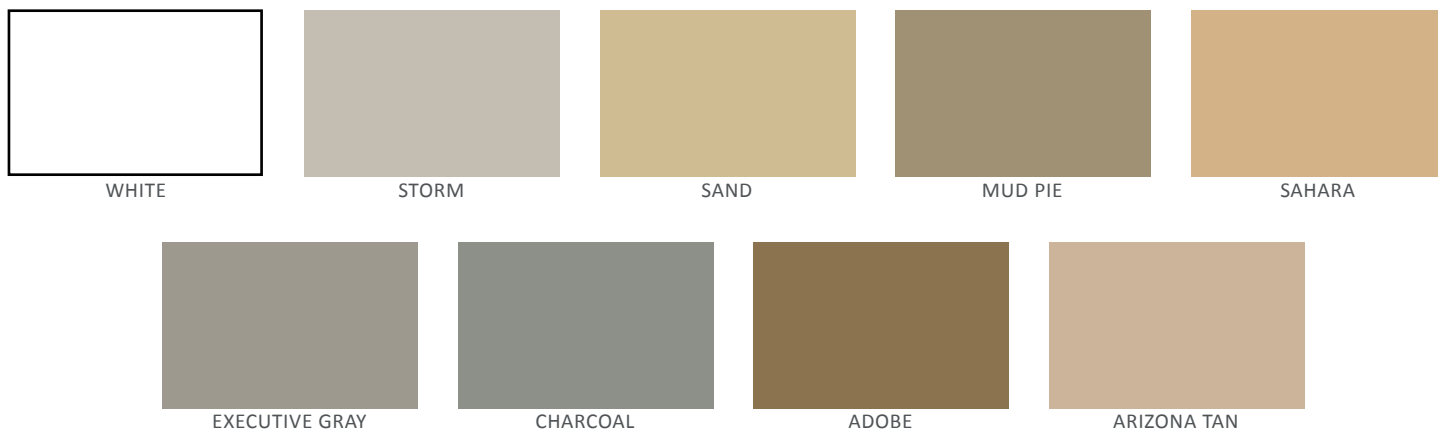

UV-Resistant Color Splash UPC, Poly, and Epoxy Sealer Options



Colors shown are approximate. More colors available.



Y = Yes (-) = not applicable

SYSTEM	DESCRIPTION	FINISH				THICKNESS (mils)		LIFESPAN* (years)
		Clear	Color	Low Gloss	Gloss	Wall	Floor	
COLOR SPLASH SBC	Solvent-borne, fast-drying acrylic.	Y	-	Y	Y	10	10	1-3
COLOR SPLASH WBC	Water-borne, long wet-edge acrylic reduces brush/roller marks.	Y	-	Y	Y	10	10	1-3
COLOR SPLASH WBB	Water-borne, long wet-edge acrylic reduces brush/roller marks.	-	Y	Y	Y	12	12	1-3
COLOR SPLASH WBE	Features WB (water-borne) Epoxy.	Y	Y	Y	Y	12	16	3-5
COLOR SPLASH TS	Features most versatile modular product, 100% solids Top Shelf® Epoxy.	Y	Y	Y	Y	16	20	5-10
COLOR SPLASH PA	Highest UV resistance, includes a low-odor Polyaspartic option.	Y	Y	Y	Y	12	16	3-5
COLOR SPLASH HS	Highest shine, includes easy-to-apply Polyurethane HS.	Y	Y	Y	Y	12	16	3-5
COLOR SPLASH RC	Uses versatile UPC RC, this low-build system has a high tolerance for contaminated concrete.	-	Y	Y	Y	16	10-35	5-10
COLOR SPLASH SL	Great for spalled or cracked concrete, this system uses adaptable UPC SL as a one-step resurfacing self-leveler.	-	Y	Y	Y	-	125 (1/8")	10-15

*With proper care. During its lifespan, a system may require an additional top coat be added to maintain high performance.

Floor Systems	COLOR SPLASH ACRYLIC SEALERS	COLOR SPLASH EPOXY & POLY SEALERS	COLOR SPLASH UPC SEALERS
Impact Resistance (lbs./in ²)	20	50	100-160
Traffic	light residential/commercial	+ moderate residential/commercial	+ heavy commercial/industrial

Low Maintenance

For daily cleaning, use KRETUS® Coating Cleaner or similar pH-neutral cleaning product.

For more information, visit kretus.com/color-splash.

COLOR SPLASH SYSTEMS BROCHURE



ADVANTAGES

USDA, FDA, EPA, SCAQMD, and VOC compliant
anti-microbial

EZ clean

green building

high-traffic tolerant

hot-tire resistant

scratch resistant

UV-resistant options

waterproofing



LIKE US ON SOCIAL MEDIA AND FOLLOW US ONLINE!

KRETUS GROUP® | kretus.com

1055 W. Struck Ave., Orange, CA 92867

DISCLAIMER: The information contained in this document is intended for use by KRETUS GROUP® qualified and trained professionals. This is not a legally binding document and does not release the specifier from his/her responsibility to apply materials correctly under the specific conditions of the construction site and the intended results of the construction process. The most current valid standards for testing and installation, acknowledged rules of technology, as well as KRETUS GROUP® technical guidelines must be adhered to at all times. Rev. 8/29/19