



THOUGHTFULLY DESIGNED COATINGS

# TOP SHELF® EPOXY (TSE)

Before selecting, consider temperature, humidity, schedule, applicator's skill level, and substrate.


## CHOOSE PART A

- A-RESIN** premium all purpose
- CAST-RESIN** countertops, resin art
- COMMERCIAL-RESIN** primer and base
- COVE-RESIN** wall cove, crack filler
- CR-RESIN** high chemical resistance
- FLEX-RESIN** plywood substrates
- T-RESIN** terrazzo

## CHOOSE PART B

- EZ** long working time, high application temps
- AP** all purpose
- TH** low moisture tolerant base coat
- FC** fast cure, low application temps
- MVR-EZ** moisture vapor reduction, slow cure
- MVR-FC** moisture vapor reduction, fast cure

Apply it **CLEAR**,  
**PIGMENTED**, or  
add **TSE COLORANT**:

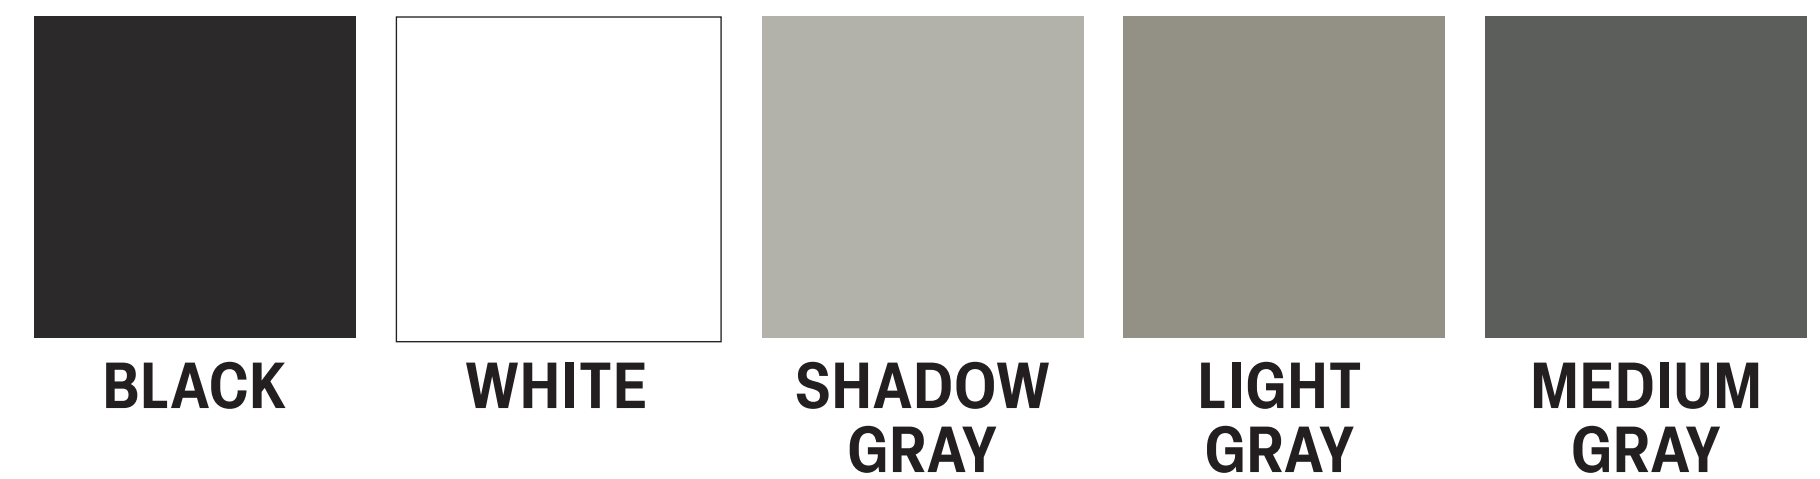

**KIT SIZES: 1.5 GALLON • 3 GALLON • 15 GALLON • DRUMS • TOTES**

[kretus.com/top-shelf-epoxy](http://kretus.com/top-shelf-epoxy)